Plusline Large (double ended)

Plusline Large 1500W R7s 240V 1CT

Mains-voltage linear with a coiled-coil filament, giving white halogen light

Product data

• General Characteristics

Cap-Base	R7s
Bulb	T4 [T4: .434 inch / 11mm]
Bulb Finish	Clear
Burning Position	p4 [Parallel +/-4D or Horizontal(HOR)]
Life to 50% failures	2000 hr

• Light Technical Characteristics

Colour Rendering Index	100 Ra8
Colour Temperature	2900 K
Colour Temperature Technical	2900 K
Lamp Luminous Flux	36300 Lm
Lamp Luminous Efficacy	24.2 Lm/W

• Electrical Characteristics

Lamp Wattage	1500 W
Technical Lamp Power	1500.0 W
Voltage	240 V
Lamp Current	6.25 A
Dimmable	yes

• Luminaire Design Requirements

Pinch Temperature	350 (max) C
Bulb Temperature	900 (max) C

• Product Dimensions

Insertion Length B	249.1 (min), 250.7 (nom), 252.3 (max) mm
Overall Length C	254.1 (max) mm
Diameter D	11 (max) mm

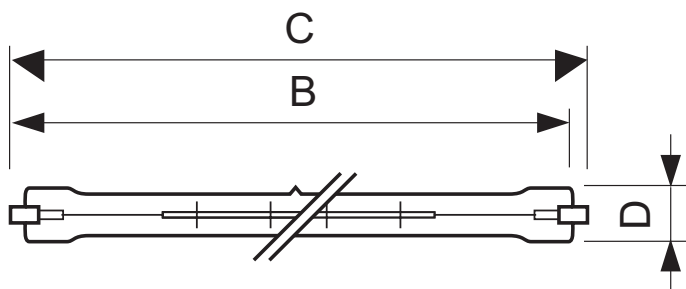### • Product Data

|	
Order code	055996 25
Full product code	871150005599625
Full product name	Plusline Large 1500W R7s 240V 1CT
Order product name	Plusline L 1500W R7s 240V 1CT/10
Pieces per pack	1
Packing configuration	10
Packs per outerbox	10
Bar code on pack - EAN1	8711500055996
Bar code on outerbox - EAN3	8711500521699
Logistic code(s) - 12NC	923932245740
ILCOS code	HDG//RS-1500-240-R7s-250,7
Net weight per piece	21.500 gr

Dimensional drawing

PHILIPS

sense and simplicity

Dimensional drawing

Plusline Large 1500W R7s 240V 1CT

Product	B (Min)	B (Norm)	B (Max)	C (Max)	D (Norm)	D (Max)
DEBig 1500W R7s 240V T11 CL	249.1	250.7	252.3	254.1	-	11

R7s

www.philips.com/lighting

2013, January 22
data subject to change